



T818 XL

3 or 4-axis CNC machining center

Centre d'usinage CN 3 ou 4 axes




16,2 kW (S6)
21.75 hp (S6)



x 31 max
(3 axes)




MODULO
(4 axes)



3375 x 1840mm
132,9 x 72,4 "



7,1 T

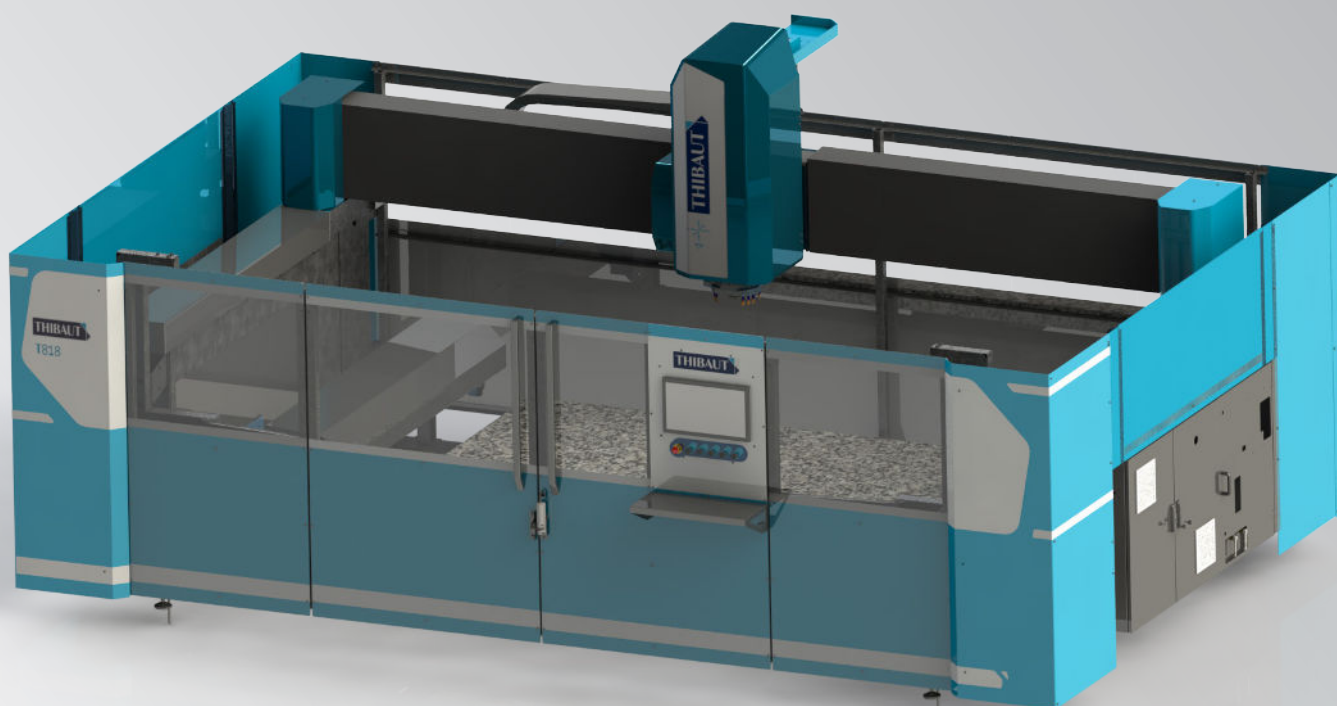

More speed. More responsiveness. More productivity.

Up to 2× faster X/Y axis movements (80 m/min) and
4× higher acceleration (2 m/s²) compared to the T812.

High-Speed Spindle Specifications:

Maximum speed: 15,000 rpm • Rated speed: 4,500 rpm
Power: 16 kW S6 at 4,500 rpm • Torque: 32.9 Nm at 4,500 rpm

Plus de vitesse. Plus de réactivité. Plus de productivité.

Des mouvements sur les axes X/Y jusqu'à 2× plus rapides (80 m/min) et
une accélération jusqu'à 4× supérieure (2 m/s²) par rapport à la T812.

Caractéristiques de la broche haute vitesse :

Vitesse maximale: 15000 tr/min • Vitesse nominale : 4500tr/min
Puissance : 16 kW S6 à 4500 tr/min • Couple : 32.9Nm à 4500 tr/min


Some operations

Quelques opérations



Dimensional drawing

Plan d'encombrement

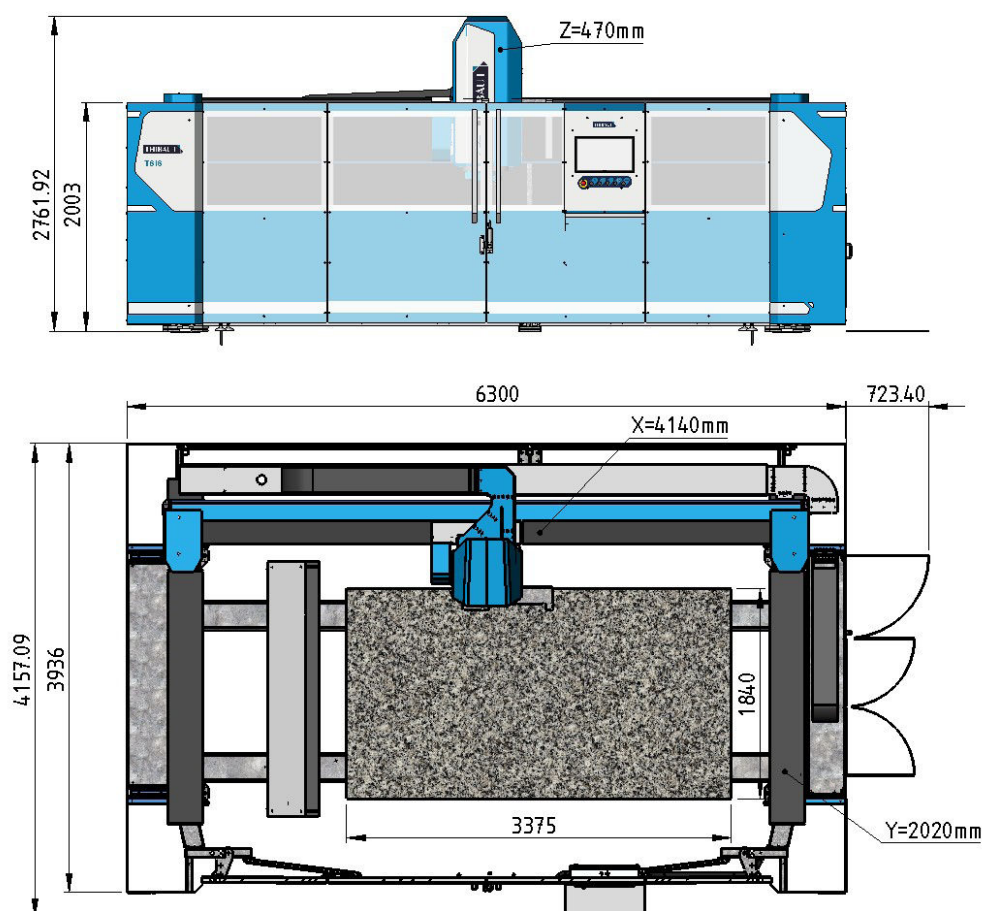

THIBAUT

ADDRESS
Avenue de Bischwiller
14500 VIRE NORMANDIE
FRANCE

PHONE
+33(0)2 31 66 68 00

www.thibaut.fr

